




## China 608 Bearing Supplier

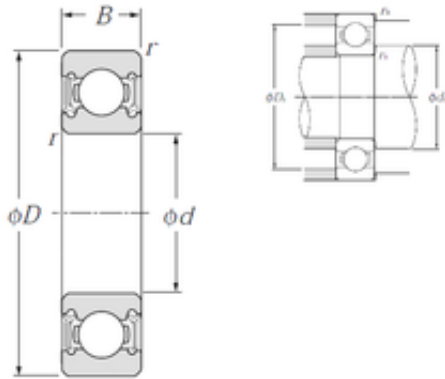

6208LLU Bearing 2D drawings and 3D CAD models

### Stainless Steel NTN 6208LLU Deep Groove Ball Bearing

Bearing No. 6208LLU

Size	40x80x18 mm
Bore Diameter	40 mm
Outer Diameter	80 mm
Width	18 mm
d	40 mm
D	80 mm
B	18 mm
C	18 mm
r min.	1,1 mm
da min.	46,5 mm
da max	51 mm
Da max.	73,5 mm
ra max.	1 mm
Weight	0,366 Kg
Basic dynamic load rating (C)	29,1 kN
Basic static load rating (C0)	17,8 kN
Reference speed	5 600 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359004700
Product Group	B00308
Enclosure	2 Seals



## China 608 Bearing Supplier

Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	40MM Bore; 80MM Outside Diameter; 18MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   -20 To 120 Deg C   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	0.807
Outside Diameter	3.15 Inch   80 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Bore	1.575 Inch   40 Millimeter
Outer Race Width	0.709 Inch   18 Millimeter
Manufacturer Item Number	6208LLU/2AS



## China 608 Bearing Supplier

bore diameter:	40 mm
precision rating:	ISO Class 0
outside diameter:	80 mm
finish/coating:	Uncoated
overall width:	18 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	18 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	18 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	5600 rpm
internal clearance:	CN
fillet radius:	1.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	10000 RPM
dynamic load capacity:	29100 N
series:	62
static load capacity:	17800 N
manufacturer product page:	<a href="#">Click here</a>